


1, Set MCU model and read MCU ID



2. Load Flash file (firmware file)

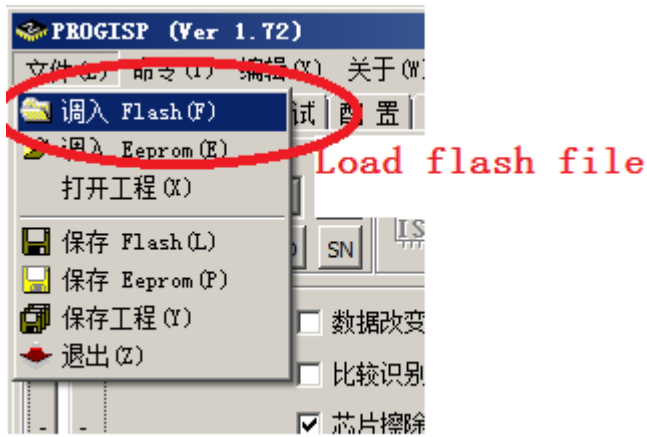

3, Read fuse.



Read fuse



#### 4, Burning new firmware

